

INSTALLATION


• WELD IN
BOLT IN
STANDARD CLAMP IN
CONCEALED CLAMP IN

DIMENSION SCHEDULE

A	B	C
12" [305]	12 1/8"	14 1/4"
14" [356]	14 1/8"	16 1/4"
16" [406]	16 1/8"	18 1/4"
18" [457]	18 1/8"	20 1/4"



GLAZING THICKNESS RANGE FROM 1/2" [13mm] TO 3/4" [19mm].  
SPECIFY STEEL OR STAINLESS STEEL SPIGOT.

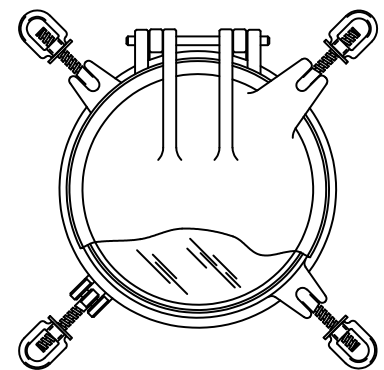

TITLE:  
WELD-IN OPENING  
ROUND PORTLIGHT

MODEL NO. PCM-3002-W  
SCALE: HALF SIZE SHEET: 1 OF: 1

REV