
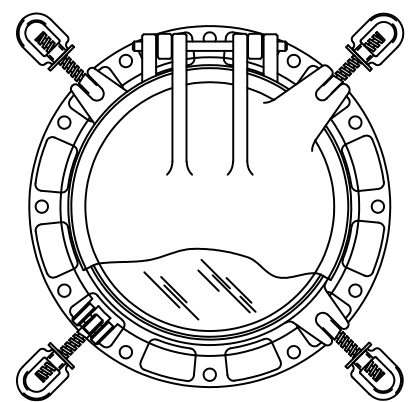


INSTALLATION

WELD IN
• BOLT IN
STANDARD CLAMP IN
CONCEALED CLAMP IN

DIMENSION SCHEDULE

A	B	C	D
10" [254]	10"	14 1/4"	10 3/8"
12" [305]	12"	16"	12 3/8"
14" [356]	14"	18"	14 3/8"
16" [406]	16"	20 3/8"	16 1/2"
18" [457]	18"	22 3/4"	18 1/2"

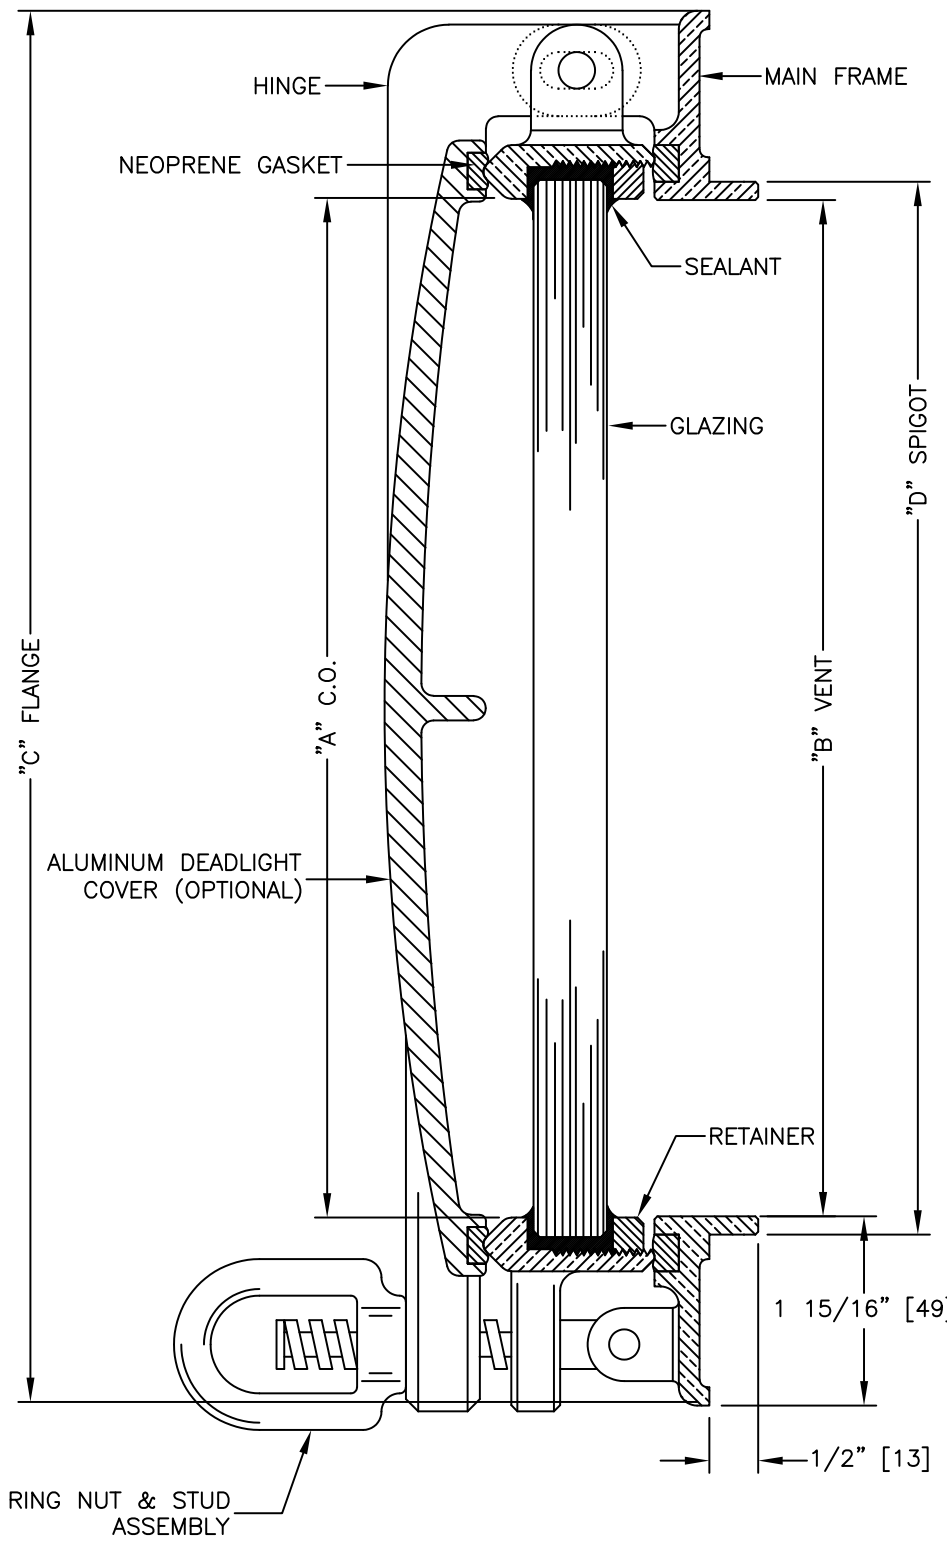

GLAZING THICKNESS RANGE FROM 1/2" [13mm] TO 3/4" [19mm].
SPECIFY BRONZE OR ALUMINUM CONSTRUCTION.



TITLE:
BOLT-IN OPENING
PORTLIGHT

MODEL NO. PCM-3006-B

SCALE: HALF SIZE SHEET: 1 OF: 1

REV