


INSTALLATION

•	WELD IN
	BOLT IN
	STANDARD CLAMP IN
	CONCEALED CLAMP IN

EXTERIOR 

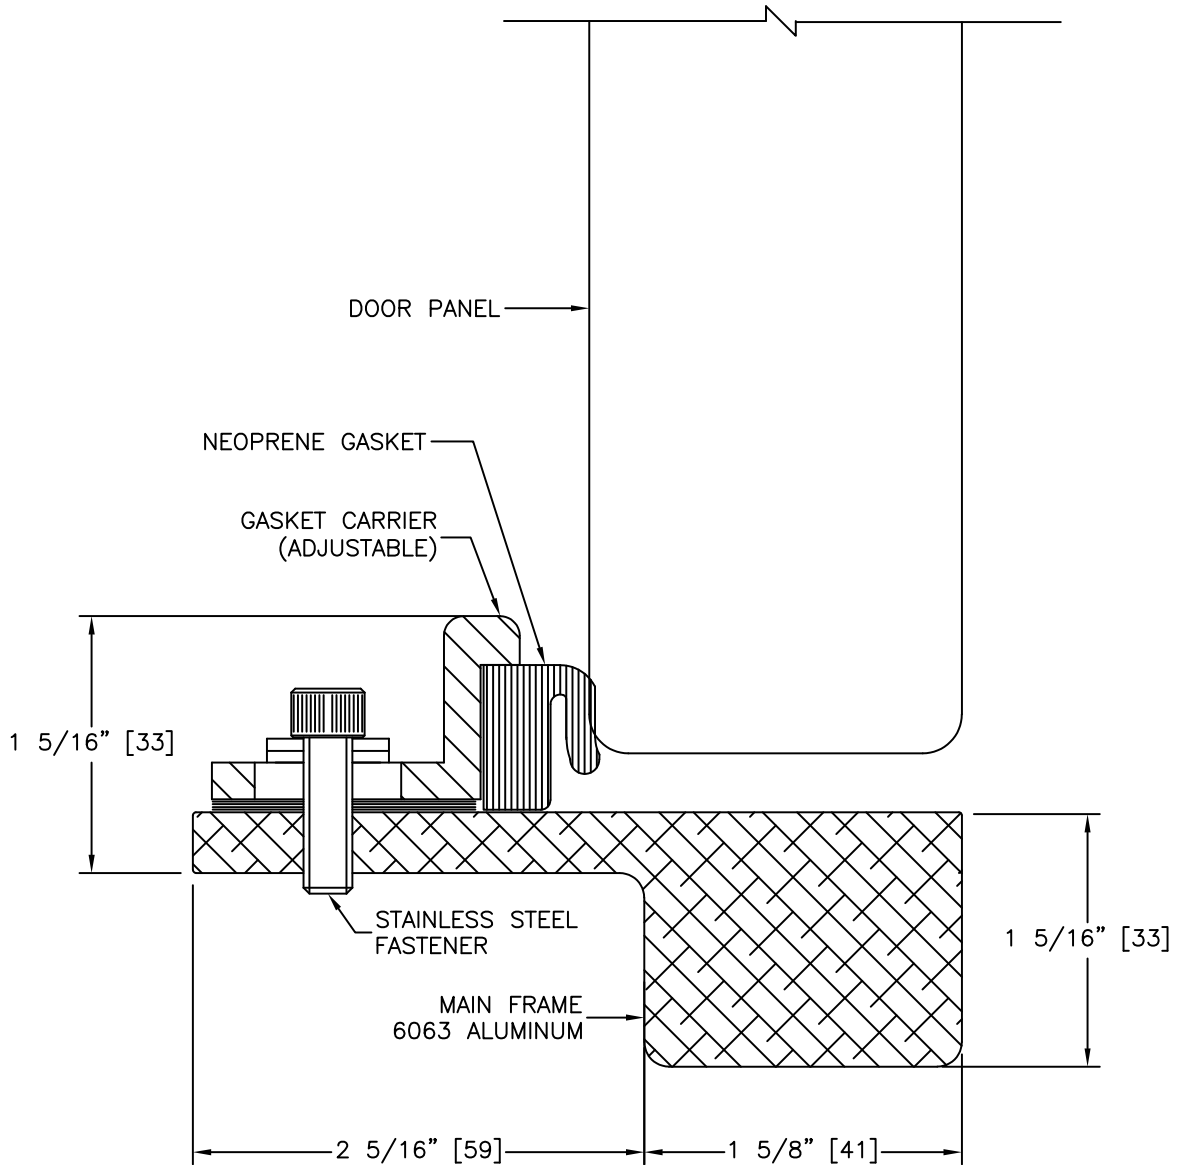

STANDARD RADIUS IS 6" [152].